


AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

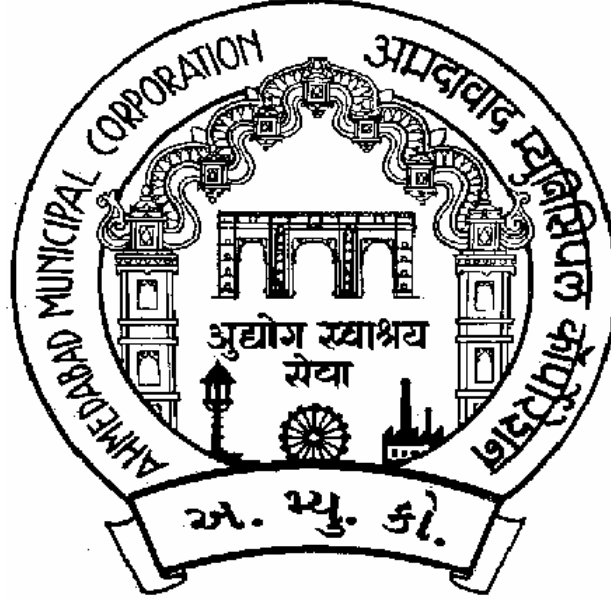

TENDER NOTICE No.-- 16

TENDER No.-- 192

TENDER FOR

**Providing and laying Nimbhada ladi paving at
Dungarji ni chali, Bhagat coloni & Dipa marvadi ni chali in Khokhra Ward.**

AUTHORITY --

**DY. MUNICIPAL COMMISSIONER (EAST ZONE)
AHMEDABAD MUNICIPAL CORPORATION
EAST ZONE OFFICE
HARUBHAI MAHETA BHAVAN
VIRATNAGAR CHAR RASTA - NIKOL
AHMEDABAD - 382415**

ENGINEER --

**ADD. CITY ENGINEER (EAST-ZONE)
AHMEDABAD MUNI. CORPO.
EAST ZONE OFFICE
HARUBHAI MAHETA BHAVAN
VIRATNAGAR CHAR RASTA - NIKOL
AHMEDABAD - 382415**

AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

MEMORANDUM OF WORK IN BRIEF -- (Cont.)

- 8 DOWN LOAD DATES FOR
TENDER FROM WEB SITE ? ----- TO -----
- 9 DATE ON OR BEFORE WHICH
THE TENDER MUST REACH
THE OFFICE ? **9/2/2010**
- 10 OPENING DATE OF THE
TENDER BY THE OFFICE ? **10/2/2010**
- 11 LOCAL COMPETITIVE BIDDING
-- TENDER CLASS -- **E1**
- 12 MODE OF SENDING THE TENDÂ Ö IN SEALED COVER BY REGISTERED
POST OR IN PERSON.
Ö TENDER SENT BY ORDINARY POST
WILL BE REJECTED OUTRIGHT.
Ö CONDITIONAL TENDER WILL BE
REJECTED OUTRIGHT.
- 13 DESCRIPTION ESSENTIAL TO ? Ö NAME OF THE WORK.
BE MADE ON SEALED COVER TENDER No.--
Ö DATE OF RECEIVING TENDER BY
CORPORATION.
- 14 MODE OF QUOTING RATES IN ? Ö PERCENTAGE RATE
SCHEDULES OF RATES. Ö IN FIGURES AS WELL AS IN WORDS.
? Ö TENDER SHELL BY SUBMITTED IN
DUPLICATE.

AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

MEMORANDUM OF WORK IN BRIEF -- (Cont.)

TENDER NOTICE No. -- 16 TENDER No. -- 192

LOCAL COMPETITIVE BIDDING -- TENDER CLASS -- E1

Name of Work -- **Providing and laying Nimbhada ladi paving at
Dungarji ni chali,Bhagat coloni & Dipa marvadi
ni chali in Khokhra Ward.** Est.. Amount - **485662.72**
E.M.D - **4857**
Tender Fee - **900**
Time Limit - **120**
DAYS

Issue Date o Last Date of Opening
Tender from ----- Receiving of Date of
to --- ----- Tender --- 9/2/2010 Tender- 10/2/2010

The Municipal Commissioner of Ahmedabad Municipal Corporation,invites Percentage rate tender for the above works of-

**Providing and laying Nimbhada ladi paving at
Dungarji ni chali,Bhagat coloni & Dipa marvadi ni chali in Khokhra Ward.**

From the contractors registered with Municipal Corporation of Ahmedabad in Class -- E1 or registered with Government of Guj. in Clas E1 or from contractors registered in similar class with any other State Government of India who have the financial capability and technical ability to carry out the work put to tender.Also Private pre qualified reputed experience builders can also apply. Experience in carrying out works ofcomparable nature is essential.

Filed up tender shall be Received by Asst. Manager East Zone, East - Zone Office Harubhai Maheta Bhavan Viratnagar Char Rasta -- Nikol Ahmedabad - 382415 On or before 9/2/2010 -- 5.00 pm. Along with Tender Fee and E.M.D.as pre inform in memorandum above.

AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

TENDER No-192

SPECIAL GENERAL INSTRUCTIONS TO TENDERERS

Name Of Work -

**Providing and laying Nimbhada ladi paving at
Dungarji ni chali,Bhagat coloni & Dipa marvadi ni chali in Khokhra Ward.**

The work is to be completed in all respects within **120** days
EXCLUSIVE OF MONSOON PE reckoned from the date of written order to
commence the work.

The tender shall be kept valid for acceptance for a period of on days -- **120**
from the date of opening of tenders.

Each tender must be accompanied by a receipt for a deposit as Earnest Money
of Rs.---- **4857** in Pay order, Demand Draft, Bank Gurentee or Chaque from
bank acceptable to the AMC.

Tender deposit is accepted as detailed out in Ahmedabad Municipal Corporation,
Section B-1,Engineering Department,percentage Rate Tender and General condition's
of Contract for Works here in afterwards referred as Form- B-1.

An overall schedule of the "Work Plan"of the project based"Network Technique Method"
Programmer Evaluated and Review Technique (PERT) / Critical Path Method (CPM)
(CPM) for appreciating his method of planning, scheduling and control of project
execution.

After the R.A. Bills of contractors are duly verified by the Engineer in charge of AMC,
theConsultant / Architect / Consulting Engineers will visit the site of works and give his
certificate, whether the work has been executed according to the standard norms and
approved designs and the workmanship is of acceptable quality. Also the work has
been progressing according to the construction programmed approved by AMC /
Architect -Consultant. On Architect and / or Consulting Engineers' recommendations.
R.A. Bills will processed for the payment.

**2% FROM EACH RUNNING BILL WILL BE RETAINED AND SHALL BE RELEASED
AT TIME OF FINAL BILL**

AHMEDABAD MUNICIPAL CORPORATION

EAST – ZONE

CONTRACTOR MUST NOTE

In the circumstances of dispute, the decision of Add. City Engineer (Zones) shall be final & bound for the contractor. In case, in the detailed specifications of materials and code of practice specifications of Index Nos. are found missing thus they must be referred from the attached booklet of specification of materials and code of practice.

PAYMENT CONDITION TO CONTRACTOR

After the R.A. Bills of contractors are verified by the Engineer in charge of AMC Add. City Engineer will visit the site and give his certificate, weather the work has been executed accordingly to the standard norms and approved designs and the workmanships of acceptable quality. Also the work has been progressing accordingly to the construction program approved by AMC Architect - consultant.

Without proper Refilling, compaction and watering no payment shall be given to contractor for excavation, refilling and or earth filling items.

After the certificate of Add. City Engineer Bills will be processed for the payment.

Progress shall be properosnate to the time limit otherwise penalty shall be imposed.

2% FROM EACH RUNNING BILL WILL BE RETAINEDAND WILL BE RELEASED AT TIME OF FINAL BILL

MATERIAL PROCUREMENT

All material like Cement, M. S. Bars / Tor steel reinforcement and structural steel, Bitumen etc. required for this work shall be procured by the contractor from the open market.

No difference in rates of cement and steel prevailing in the market in Ahmedabad at a later date shall be paid /Recovered by A.M.C.(as the case may be) to / from contractor for the procurement of Cement and Steel from open market in Ahmedabad. Contractor will not be paid for any transport, handling & storage expenses separately and he should quote for the works accordingly.

Test certificate for All materials Like Cement and Steel, Bitumen shall be obtained and submitted by contractor. Contractor shall have to produce test certificates for all procurement of Cement and Steel.

AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

INSTRUCTION TO THE TENDERER

ALL INSTRUCTIONS TO TENDERERS, SPECIAL INSTRUCTIONS FOR CONTRACTORS, DOCUMENTS, RULES FOR GRANT OF ADVANCES, CLAUSE FOR ARBITRATION, GENERAL SPECIFICATIONS, PROJECT INFORMATION GENERAL, PAYMENT CONDITION TO THE CONTRACTOR, DEFINITION OF TERMS EARNEST MONEY, SUBMISSION OF TENDERS, GENERAL RULES AND DIRECTIONS FOR THE GUIDANCE OF CONTRACTORS TERMS AND CONDITIONS OF CONTRACT AS PER FORMB-1. ETC. SHALL BE AS PER STANDARD PERFORMA OF AHMEDABAD MUNICIPAL CORPORATION OF ENGINEERING DEPARTMENT AND SHALL BE APPLIED TO THIS TENDER CONTRACTOR MUST HAVE THIS DOCUMENT AND SHALL BOUND FOR THE SAME.

DECLARATION

I HAVE ABOVE DOCUMENT (P.W.D. GENERAL TECHNICAL SPECIFICATION) AND HAVE READ ALL ABOVE CONDITIONS, CLOSES, INSTRUCTIONS ETC. AND AGREE TO ABIDE BY THEM.

I HAVE ALSO GONE THROUGH CONDITIONS AND CLOSES OF FORM B -1 AND AGREE TO ABIDE BY THEM.

I HAVE ALSO GONE THROUGH TECHNICAL SPECIFICATION FOR THE ITEMS AND AGREE TO ABIDE BY THEM.

IN THIS TENDER THERE ARE MANY ADDITIONAL AND ALTERATION ITEMS HENCE MANY ITEMS ARE LIKELY TO BE DROPPED OR THERE QUANTITIES ARE LIKELY TO BE VARY UP TO ANY EXTENT AND HENCE FOR THIS CONTRACTOR WILL NOT CLAIM FOR ANY EXTRA OR COMPENSATION. FOR THE SAME I AGREE TO ABIDE BY THEM.

GENERAL RULES & DIRECTIONS FOR THE GUIDANCE OF CONTRACTORS TERMS AND CONDITIONS OF CONTRACT AS PER FORMB-1. ETC. SHALL BE AS PER STANDARD PERFORMA FOR TENDER OF AHMEDABAD MUNICIPAL CORPORATION OF ENGINEERING DEPARTMENT AND SHALL BE APPLIED TO THIS TENDER . CONTRACTOR MUST HAVE THIS DOCUMENT.

I HAVE ALSO GONE THROUGH CONDITIONS AND CLOSES OF FORM B -1 AND AGREE TO ABIDE BY THEM.

Dated Signature Of Contractor
With Seal

Add. City Engineer (East - Zone)

AHMEDABAD MUNICIPAL CORPORATION

EAST – ZONE

DECLARATION FORM :

TENDER No-192

Name of the work for which the Tender is under consideration-

**Providing and laying Nimbhada ladi paving at
Dungarji ni chali, Bhagat coloni & Dipa marvadi ni chali in Khokhra Ward.**

- 1 I / We hereby declare that I / We have visited the above site & fully acquainted my self / our selves with the local situation regarding materials, labor and other factors pertaining to the work before submitting this tender.
- 2 I / We hereby declare that I / We have carefully studied the conditions of contract, sections and other tender documents of this work and agree to execute the same accordingly.
- 3 I / We hereby declare that I / We shall not charge any costs towards the visit of site for preparing the tender for submission accordingly.
- 4 I / We hereby declare that My / Our near relatives are not working in A.M.C. as City Engineer, Add. City Engineer, Dy. City Engineer, Asst. City Engineer, Assistant Engineer, Add. Assistant Engineer, Assistant Manager, Accountant, Store Keeper or Any such category.

Dated Signature Of Contractor
With Seal

Add. City Engineer (East - Zone)

AHMEDABAD MUNICIPAL CORPORATION

EAST – ZONE

GENERAL SPECIFICATION

The work shall be completed with in **120** Days after the order to start the work is given **EXCLUSIVE OF MONSOON PERIOD**

The details of reinforcement of R.C.C. work shall be as per design and instruction of Add. City Engineer or his representative and his order will be considered final. The contractor shall have to maintain account of steel, cement and other materials, that may be brought by him on site. This account shall be regularly maintained and kept open for inspection by municipal staff. Watering of all the items shall be done as per instructions. Mixing of concrete shall be done by concrete mixer machine.

Arrangements of bringing vibrator for R.C.C. works if required shall have to be made by the contractor.

The contractor shall remain responsible for workman's compensation of any when such case occurs. The contractor shall arrange formed lams at night and fencing and pagi and shall be responsible for any damage of life and limb property if any happen, during the execution of work in case of dispute for unseen or over locker items the decision of the Add. City Engineer or his representative shall be final. The contractor shall have to give clean of all rubbish on completion of work and have over the building with final finishing of the as directed all the projected material shall be removed from site with in 24 hours by contractor at his risk and cost.

For mixing mortar either for masonry or for plaster; or for any other purpose contractor shall have to prepare through of bigger size and mix the mortar in he required proportion In on case he shall be allowed to mix the mortar either on floor or any finish surfaces.

The contractor shall have to make his own arrangement for water required for the work and shall pay the water charges as per water meter.

If any extra item crops up during the progress of work the same shall be carried out by the contractor and he shall be paid at the rate fixed by Add. City Engineer or his representative as per the rate analysis based on current market rates.

If in the interest of the Corporation it is necessary to change either any site or the design of the proposed work the contractor shall carry out the same at his quoted rates without charging any extra and the contractor will have to carry out the works and he will be paid at the rates quoted by him and no claim for extra subsequent changes may be entertained.

The cubical contents of the cement bag shall be taken as 1.25 cft. or 0.035 cmt. / bag and the contractor shall have to prepare the measure box according to this measures. The R.C.C. Or specified work shall not be done Sunday and holiday except in emergency or when technical requirements are such that continuity of work should be maintained and that too will be with prior permission of the competent authority.

AHMEDABAD MUNICIPAL CORPORATION

EAST – ZONE

GENERAL SPECIFICATION (cont.)

Retention money at the rate of 2% shall be deducted from every bill of the contractor and which will be paid at the time of final bill, for works costing less than Rs. 10 lakhs. Octroi exemption passes shall not be given for any materials required for this work Contractor will be fully responsible for compliance of the various provision under contract Act. 1970 and rules framed there under.

The tender for the work shall remain open for a per **120** days from the date of opening of the tenders for this work and that the Tendered shall not be allowed to withdraw or modify the offer on his own during this period. If any Tendered withdraws or makes any, modification's) or addition's) in the terms and condition of his tender not acceptable to the Municipal Corporation, the Municipal Corporation shall without prejudice to any right or remedy be at liberty to forfeit in full the said earnest absolutely.

No Materials shall be supplied by A.M.C. The contractor have to make their own arrangement for procurement of materials from open market. But the contractor shall have to give necessary test certificates for different materials as per relevant I.S. code before using the same in the work.

As per circular No MGR 2176(96),2418 (ii)GHH dated 31-3-77 issued by Government of Gujarat contractors are requested to procure their quarry materials required for construction work through legal sources i.e. Only from the quarry lease. holders permit holder or middleman who satisfies the contractor as the legality of the source of purchase by him on these materials.

If the work is not carried out within the specified Time-Limit (**120** days) from the date of order to start the work the Penalty of **100** Rupees per day of delay shall be recovered from the immediate bills payable to the Contractor.

And If the work is carried out before the specified Time - Limit the Intensive of **100** Rupees per day shall be given.

The contractor shall have to take labor License of the work as per Labor act. The contractor shall have to follow Child Labor act. All Tenders are to be submitted in duplicate without which the tenders are liable to be rejected. Conditional tender will not be accepted.

Dated Signature Of Contractor
With Seal

Add. City Engineer (East - Zone)

NAME OF WORK --

Tender No - 192

**Providing and laying Nimbhada ladi paving at
Dungarji ni chali, Bhagat coloni & Dipa marvadi ni chali in Khokhra Ward.**

GENERAL AND STANDARD TECHNICAL SPECIFICATIONS FOR WORK.

GENERAL

- 1 In the specifications "as directed" / " approved shall be taken to meanas "'directed" / "approved" by the Engineer-in-charge.
- 2 Wherever a reference to any Indian Standard appears in the specifications, it shall be taken to mean as a reference to the latest edition of the same inforce on the date of agreement.
- 3 In "Mode of Measurement" in the specification wherever a dispute arises in the absence of specific mention of a particular point or aspect, the provisions on these particular points or aspects in the relevant IndianStandards shall be referred to.
- 4 All measurements and computations, unless otherwise specified, shall becarried out nearest to the following limits:
 - (i) Length, width and depth (height) 0.01 meter.
 - (ii) Areas 0.01 Sq. Mt.
 - (iii) Cubic Contents 0.01 Cu. Mt.

In recording dimensions of work, the sequence of length, width, and height (depth) or thickness shall be followed.
- 5 The distance which constitutes lead shall be determined along the shor test practical route and note necessarily the route actually taken. The decision of the Engineer-in-charge in this regard shall be taken as final.
- 6 Where no lead is specific, it shall mean "all leads".
- 7 Lift shall be measured from plinth level.
- 8 Up to "floor two level" means actual height of floor (Maxi. 4 M) up to 3 Mt. Above plinth level.

- 9 Definite particulars covered in the items of work, though not mentioned or elucidated in it specifications shall be deemed to be included therein.
- 10 Reference to specifications of Materials as made in the detailed specification of the items of works is in the form of a designation containing them number of the specification of the Materials and prefix 'M' e.g. "M-5"
- 11 Approval to the samples of various Materials given by the Engineer in charge shall not absolve the contractor from the responsibility of replacing defective Materials brought on site or Materials used in the work found defective at a later date. The contractor shall have no claim to any payment or compensation whatsoever on accounts any such Materials being rejected by the Engineer-in-charge.
- 12 The contract rate of the item of work shall be for the work completed in all aspects.
- 13 No collection of Materials shall be made before it is got approved from the Engineer-in-charge.
- 14 Collection of approved Materials shall be done at site of work in a systematic manner. Materials shall be stored in such manner as to prevent damage, deterioration of intrusion of foreign matter and to ensure the preservation of their quality and fitness for the work.
- 15 Materials, if and when rejected by the Engineer-in-charge, shall be immediately removed from the site of work.
- 16 No Materials shall be stored prior to, during and after execution of a structure in such a way as to cause or lead to damage or overloading of the various components of the structure.
- 17 All works shall be carried out in a workman like manner as per the best techniques for the particular item.
- 18 All tools, templates, machinery and equipment for correct execution of the work as well as for checking lines, levels, alignment of the work during execution shall be kept in sufficient numbers and in good working condition on the site of the work.
- 19 The mode, procedure and manner of execution shall be such that it does not cause damage or overloading of the various components of the structure during execution or after completion of the structure.

- 20 Special modes of construction not adopted in general Engineering practice, if proposed to be adopted by the Contractor, shall be considered only if the contractor provides satisfactory evidence that such special mode of construction is safe, sound and helps in speedy construction and completion of work to the required strength and quality. Acceptance of the same by the Engineer-in-charge shall not, however, absolve the contractor of the responsibility of any adverse effects and consequence of adopting them in the course of execution or completion of the work.
- 21 All installations pertaining to water supply and fixtures thereof as well as drainage lines and sanitary fittings shall be deemed to be completed only after giving satisfactory tests by the contractor.
- 22 The contractor shall be responsible for observing the rules and regulations imposed under the "Minor Minerals Act", and such other laws and rules prescribed by Government from time to time.
- 23 All necessary safety measures and precautions (including those laid down in the various relevant Indian Standards) shall be taken to ensure the safety of men, Materials and machinery on the works as also of the work itself.
- 24 The testing charges of all Materials shall be borne by the Contractor.
- 25 Approval to any of the executed items for the work does not in any way relieve the contractor of his responsibility for the correctness, soundness and strength of the structure as per the drawings and specifications.

I HAVE ALSO GONE THROUGH TECHNICAL SPECIFICATION FOR THE ITEMS (AS PER STANDARD P.W.D. TECHNICAL SPECIFICATION FOR THE ITEMS AND ALSO I HAVE THE C661 BOOK OF THE SAME) AND AGREE TO ABIDE BY THEM. (ALSO AVAILABLE ON AMC WEB SITE)

IN CASE OF WHERE THERE IS NO TECHNICAL SPECIFICATION FOR THE ANY ITEMS AVAILABLE, SPECIFICATION GIVEN BY THE ENGINEER IN CHARGE SHALL BE FOLLOWED. AND FOR THE SAME I AGREE TO ABIDE BY THEM.

IN THIS TENDER THERE ARE MANY ADDITIONAL AND ALTERATION ITEMS HENCE MANY ITEMS ARE LIKELY TO BE DROPPED OR THERE QUANTITIES ARE LIKELY TO BE VARY UP TO ANY EXTENT AND HENCE FOR THIS CONTRACTOR WILL NOT CLAIM FOR ANY EXTRA OR COMPENSATION. FOR THE SAME I AGREE TO ABIDE BY THEM.

Dated Signature Of Contractor
With Seal

Add. City Engineer (East - Zone)

AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

F SECTION -- E

SUMMARY OF COST AND

SCHEDULE OF QUANTITIES AND RATES

CONTENTS --

- PREAMBLE
- SUMMARY OF COST AND RECAPITULATION SHEET ()
- SCHEDULE OF QUANTITIES & RATES)

AHMEDABAD MUNICIPAL CORPORATION

EAST -- ZONE

PREAMBLE

- 1 The schedule of quantities and Rates are to be read for the purpose of pricing in conjunction with instructions to Tenderers, technical specifications, drawings and general conditions of contract for civil works.
- 2 The Price quoted in the summary of costs; sheet of schedule of quantities and rates shall be in all inclusive value for the work described including all costs and expenses which may be required in and for the execution of the work described together with all general risks, liabilities and obligations set forth or implied in the document on which the tender is based.
- 3 The quantities furnished are approximate. In the event of actual quantities varying from those furnished herein below or items deleted or added, the Rates quoted for the entire work shall remain firm and no extra claims in this respect will be entertained. The payment shall be made based on the actual quantities in the completed work.
- 4 All works shall be carried out strictly as per detailed specifications whether actually specified or not. If not specified, as per directions of Owner/ Engineer.
- 5 Rates quoted by Tenderer shall be firm even if the contract is split. If tenderer does not agree to keep his quoted Rates valid under such a condition he shall clearly state so in his bid.
- 6 Rates and the total amount entered in the summary of cost sheet of schedule of quantities and rates shall be written in ink and shall be entered both in figures and words.
- 7 If Tenderer need any clarifications, they should obtain the same in writing from owner/ Engineer. No notice will be taken of any verbal discussion in such matter.

Note :

- 1 Rate and amount shall be written in ink and shall be entered both in figures and words.
- 2 Refer Schedule of quantities for items of Works, Estimated Quantities and
- 3 Plans are available with Asst. City Engineer. Contractor are allowed to see it during office hours in his office.

AHMEDABAD MUNICIPAL CORPORATION - EAST ZONE

Tender No - 192

TENDER FOR

**Providing and laying Nimbhada ladi paving at
Dungarji ni chali, Bhagat coloni & Dipa marvadi ni chali in Khokhra Ward.**

**Time limit - 120
Days**

RECAPITULATION SHEET

Sr.No	DESCRIPTION	AMOUNT
	MAIN ESTIMATED TENDER COST	
	C.F. THIS TOTAL FROM TENDER ABSTRACT SHEET --	485662.72
		=====
	TOTAL Rs. -- A	485662.72

I WRITE HOW MUCH PERCENTAGE HIGHER
OR LOWER IN FIGURES _____ ° _____ % LOWER / HIGHER
(Strikeout which ever is not applicable) --^

II WRITE HOW MUCH PERCENTAGE HIGHER or LOWER IN WORDS -

_____ **PERCENT LOWER / HIGHER**
(Strikeout which ever is not applicable) --^

III **WRITE AMOUNT IN Rs. -- B**

IV **Rs. -- C**

IF PERCENTAGES QUOTED IS HIGHER THAN ADD AND SUM IT. (i.e. C=A+B) OR
IF PERCENTAGES QUOTED IS LOWER THAN DEDUCT AND SUBSTRATE IT.(i.e. C=A-B)

V WRITE AMOUNT IN WORDS - Rs.-- _____

Dated Signature Of Contractor
With Seal

Add.City Eng. _eAST Zone

AHMEDABAD MUNICIPAL CORPORATION - EAST ZONE

TENDER ABSTRACT FOR WORK OF

Tender No - 192

Abstract 1
Sheet - 2
of - 3

Providing and laying Nimbhada ladi paving at
Dungarji ni chali, Bhagat coloni & Dipa marvadi ni chali in Khokhra
Ward.

I.No.	Item Description	QTY.	RATE	UNIT	AMOUNT
1	Excavation for foundation upto 1.5 mt. depth including sorting out stacking of useful material & disposing of excavated stuff upto 50 mt. lead.				
	(A) Loose or soft soil	293.00	38.90	Cmt	11397.70
2	Conveyance charge of earth, lime, murrum, building rubbish, manure, garbage, sludge, excavated rock, fly ash, aggregates of any kind Including spreading & levelling etc. complete.	336.00	88.32	Cmt	29675.52
3	Supplying and fixing ordinary Nimbhada ladi 37 to 50 mm thick for walk-way, covering the activity of excavation, ramming, with cement pointing in cement mortar 1:2 etc complete as directed. (Width should not be less than 30 cm & length should not be more than 75 cm				
	Laying on 5 Cms thick Sand Bedding	1935.00	178.00	Smt	344430.00
4	P/L brickbats sand concrete (1:2) of one part of sand and two of old brickbats including spreading, laying, ramming, watering and consolidation etc complete as directed.	77.00	350.00	Cmt	26950.00
5	Removing any kind of pavement floors or C.C. kerb laid on CM including stacking of serviceable materials & disposal of unserviceable materials with all lead & lift. (Take Horizontal surface area)	1935.00	9.70	Smt	18769.50
6	Conveyance charge for CC blocks, WT & Kerb of any design from work site to AMC store incl. Loading, unloading etc. comp. As dire.	3870.00	2.00	No	7740.00
7	Labour work for fixing any kind of paving on 5 cms. Thick sand bedding with cement pointing in CM (1:2) including watering, ramming etc. comp.				
	(I) For pavement	774.00	50.00	Smt	38700.00
8	Raising of existing MH to th. Top surface of road level incl. removing mesonary up to 1 mt depth clearing the dibrise with cost. The masonry in c:m 1:5 with cement plater inside incl. Fixing MH cover with top finishing etc. comp. As dire as per inst. Of officer in charge of work should be comp.	10.00	500.00	NO	5000.00
9	Raising of existing chamber i.e. up To surface of road level incl. removing old birck mesonary in cm.1:5 with cement plater inside incl. Fixing CL cover with top finishing etc. comp. As dire as per inst. Of officer	12.00	250.00	NO	3000.00

B.F. THIS TOTAL TO TENDER ABSTRACT SHEET -- 485662.72